


Data Sheet

VIAVI LC 1x1

Low Cost GPSDO Single Oven Oscillator

Typical Electrical Specifications

Module Specifications	
1 PPS Accuracy	LVDS level, ± 35 ns to UTC RMS (1-Sigma) GPS Locked
Holdover Stability	$< \pm 15$ μ s over 24 hours @ +25.0°C (No Motion or Airflow, 5+ days with GPS)
Oscillator Options	DOCXO with SC-cut Crystal option
Serial Control	RS-232 level GPS NMEA output and SCPI control
GPS Frequency	L1, C/A 1574 MHz
GPS Antenna	Active or Passive
GPS Receiver	50 Channels, Mobile, SBAS WAAS, EGNOS, MSAS capable
Sensitivity	
Acquisition	-142 dBm
Tracking	-158 dBm
GPS TTFF	
Cold Start	<45 sec
Warm Start	1 sec
Hot Start	1 sec
ADEV (GPS Locked, 25°C, no motion)	
1K s	<1E-010
10K s	<8E-012

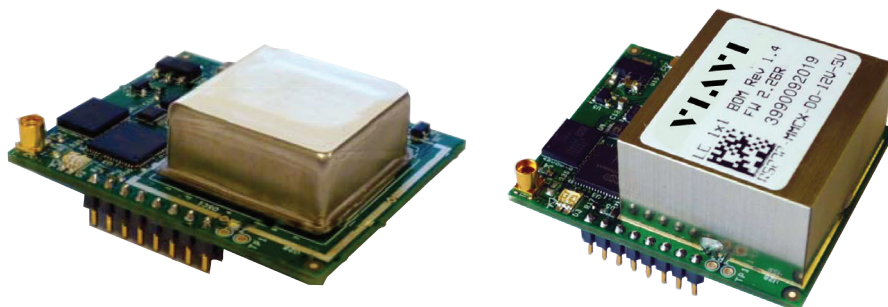

Low Cost GPSDO Single Oven Oscillator

Module Specifications continued		
TTL Alarm Output	GPS LOCK and Event indicator	
Warm Up Time/Stabilization Time	<9 min at +25°C to 5E-09 Accuracy no airflow	
Supply Voltage (Vdd)	12 V ±5%, <0.21 A steady state	
Power Consumption	<2.4 W steady state, <8 W warmup	
Temperature		
Operating Temperature	-40°C to +85°C	
Storage Temperature	-45°C to +85°C	
Output Signal Levels	10 MHz LVDS, 1 PPS LVDS, CMOS option, secondary 10 MHz output option	
Oscillator Specification		
Frequency Output	10 MHz CMOS/LVDS	
10 MHz Retrace	±2E-08 After 1 hour @ +25°C (no GPS)	
Frequency Stability over Temperature, and over 24 hours	<±5E-09 (no GPS), <1E-012 over 24 hours (with GPS, no airflow)	
Output Amplitude	LVDS, or CMOS option	
OCXO Warm Up Time	<3 min @ +25°C	
Phase Noise	1 Hz	-90 dBc/Hz
	10 Hz	-120 dBc/Hz
	100 Hz	-140 dBc/Hz
	1 kHz	-150 dBc/Hz
	10 kHz	-155 dBc/Hz
	100 kHz	<-155 dBc/Hz

NOTE: Specifications subject to change without notice.



Contact Us +1 800 835 2352
avcomm.sales@viavisolutions.com

To reach the VIAMI office nearest you, visit
viavisolutions.com/contact.

© 2024 VIAMI Solutions Inc.
Product specifications and descriptions in this document are subject to change without notice.
Patented as described at
viavisolutions.com/patents
lc1x1-ds-avi-nse-ae
30194034 900 0124